

Terminal Blocks - Single Row


All Series Marking Options Single Row Terminal Blocks

Marking Options & Accessories


Standard Marking

Markings are applied directly to the sides of Series 1000, 2000, 3000, and 4000. Standard characters are white and 1/8" high. Factory may substitute 3/32" high characters.


Blocks to be marked on both sides require a different code for each side. Example: "L1" on one side of the block requires "L2" on the other side to ensure common terminal marking. Specify by adding suffix to part number.




L1
Upright Numerals
Left to Right




L2
Upright Numerals
Right to Left




L3
Left Lying Numerals
Left to Right



L4
Right Lying Numerals
Right to Left




L5
Upside-Down Numerals
Right to Left



L6
Upside-Down Numerals
Left to Right

Special Marking


Special markings are available for Series 1000, 2000, 3000, 4000 & 5000 at an additional charge for preparation. Production charges for setup, handling and marking are the same as for standard marking and the same quantity discounts apply. Consult factory for price and delivery.

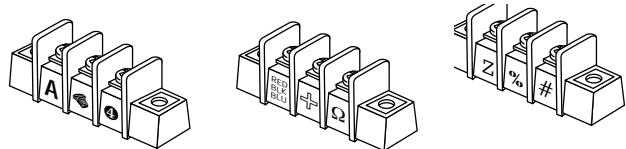

Closed Barrier Terminal Block Marking Options

- L1 & LT1 = Upright numerals, numbered from left to right
- L2 & LT2 = Upright numerals, numbered from right to left
- L3 = Left lying numerals, numbered from left to right
- L4 = Right lying numerals, numbered from right to left
- L5 & LT5 = Upside down numerals, numbered from right to left
- L6 & LT6 = Upside down numerals, numbered from left to right


**Options LT1 - LT6
Top Marking**
For high visibility in tight packages.

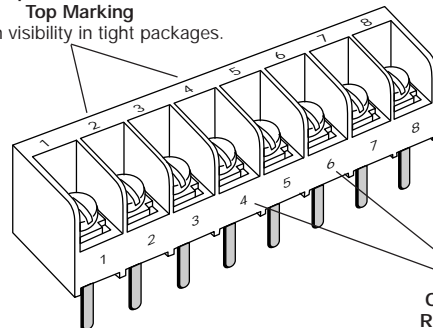

**Options L1 - L6
Regular Marking**

Marker Strips

Black marker strips with white numerals mount beneath the terminal blocks to clearly identify terminal and wire positions. Available with forward or reverse markings, top or bottom of strip. If special markings are required, submit a drawing.



Bottom Forward - BF

Top Forward - TF

Bottom Reverse - BR

Top Reverse - TR

Series



- MS1 - 1000 Series
- MS2 - 2000 Series
- MS3 - 3000 Series

Base



- 1 - mount end, feed thru
- 2 - barrier end, feed thru
- 3 - mount end, insulator tubes
- 4 - barrier end, insulator tubes
- 5 - mount end, non feed-thru

Poles



- 02 to 36

Marking



- BF - bottom forward
- TF - top forward
- BR - bottom reverse
- TR - top reverse

All Series Accessories

Single Row Terminal Blocks *Continued*

Cover Options - Single Row


Terminal Block Covers

Available for Series A1000, A2000, A3000, A4000, CB2000, CB3000, LP2000, & LP3000.
 Three styles of UL 94V0 thermoplastic covers are offered in black. Covers are ordered separately and supplied with two clips each, unless ordered without clips. Optional markings may be specified (black on yellow; white on black).

Notes: Covers can not be used with:
 • mounting plate options MP & MT.
 • certain quick connect terminals.
 • 0, 6, & 9 base/end styles on A2 or A3


Bulk Cover Clips: Series 1000 = **CC1-J**; Series 2000 & 3000 = **CC2-J**; Series 4000 = **CC4-J**.

Standard Cover Markings
 Top Forward - TF



Bottom Forward - BF
 Skirted Access Side


Top Reverse - TR




Bottom Reverse - BR
 Skirted Access Side



Cover Options
BB & CB
 Skirted access
 on both sides.



Cover Options
BO & CO
 Skirted access
 on one side only.



Cover Options
BC & TC
 Open access
 on both sides.

Cover



BB - skirted access, both sides, black
BO - skirted access, one side, black
BC - open access, both sides, black*
 * Not available in 4000 Series

Series



1 - 1000
2 - 2000
3 - 3000
4 - 4000

Poles



02 to 36

Markings



BF - bottom forward
TF - top forward
BR - bottom reverse
TR - top reverse

Options



00 - without clips

Snap-On Covers for A38/B38/F38 Series & CB2/CB3 Series

A38/B38 Series



T A 8	-	<input type="checkbox"/>	<input type="checkbox"/>	A38 Series
T B 8	-	<input type="checkbox"/>	<input type="checkbox"/>	B38 Series
F B 8	-	<input type="checkbox"/>	<input type="checkbox"/>	F38 Series

CB2/CB3 Series



T 0 2	-	<input type="checkbox"/>	<input type="checkbox"/>	CB2 Series
T 0 3	-	<input type="checkbox"/>	<input type="checkbox"/>	CB3 Series