

# MAP130 Series AC-DC Power Supplies



## Key Features & Benefits

- RoHS Lead-Solder-Exemption Compliant
- Automatic 115/230 Input Voltage Selection
- All Outputs Fully Regulated
- Remote Sense, Overvoltage Protection and Overtemperature Protection
- Power Fail Signal Included
- Greater than 100,000 Hour MTBF
- U-Channel Chassis: 8.5 x 4.5 x 2.0 inch (215.9mm x 114.3mm x 50.8mm)
- Optional Cover
- Metric and SAE Mounting Inserts

Bel Power Solutions MAP130 Series of single and multiple output power supplies provide fully-regulated outputs with high peak current capabilities in a compact 4.5 x 8.5 x 2.0 inch U-channel chassis. Other standard features include auto select AC input, EMI level B filtering, power fail, thermal shutdown (with warning), remote sense, and metric and SAE mounting inserts.

This convection-cooled series is designed for use in commercial and industrial environments in temperatures up to 50°C.

All products are approved to the latest international regulatory standards and display the CE Mark.

### North America

+1-866.513.2839

### Asia-Pacific

+86.755.29885888

### Europe, Middle East

+353 61 225 977

tech.support@psbel.com  
[belpowersolutions.com](http://belpowersolutions.com)

# MAP130 Series

## Single-Output Model Selection

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	CONTINUOUS CURRENT	PEAK CURRENT <sup>1</sup>	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE <sup>2</sup>	INITIAL SETTING ACCURACY
MAP130-1005	5V	4.75V to 5.50V	26A	30A	0.2%	1%	1%	5.1V to 5.2V
MAP130-1012	12/15V	11.4V to 15.75V	12A/10A <sup>3</sup>	13.8A/11A <sup>3</sup>	0.2%	1%	1%	12.0V to 12.2V
MAP130-1024	24V/28V	22.5V to 30.0V	6.25A/5.4A <sup>3</sup>	6.8A/5.9A <sup>3</sup>	0.2%	1%	1%	23.9V to 24.1V

## Multiple-Output Model Selection – 130 W Continuous Output Power

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	OUTPUT CURRENT	PEAK CURRENT <sup>4</sup>	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE <sup>5</sup>	INITIAL SETTING ACCURACY
MAP130-4000	+5V	4.75V to 5.50V	20A	30A	0.2%	1%	1%	5.1V to 5.2V
	+12V	11.5V to 12.5V	5A	10A	0.5%	2%	1%	11.75V to 12.0V
	-5V	Fixed	1A	1A	0.5%	2%	1%	-4.8V to -5.2V
	-12V	Fixed	1A	1A	0.5%	2%	1%	-11.6V to -12.4V
MAP130-4001	+5V	4.75V to 5.50V	20A	30A	0.2%	1%	1%	5.1V to 5.2V
	+24V	23.0V to 25.0V	3.5A	5A	0.5%	2%	1%	23.9V to 24.1V
	-12V	Fixed	1A	1A	0.5%	2%	1%	-11.6V to -12.4V
MAP130-4002	+12V	Fixed	1A	1A	0.5%	2%	1%	-11.6V to -12.4V
	+5V	4.75V to 5.50V	20A	30A	0.2%	1%	1%	5.1V to 5.2V
	+12V	11.5V to 12.5V	5A	10A	0.5%	2%	1%	11.9V to 12.1V
MAP130-4003	-12V	Fixed	1A	1A	0.5%	2%	1%	-11.6V to -12.4V
	+12V	Fixed	1A	1A	0.5%	2%	1%	11.6V to 12.4V
	+5V	4.75V to 5.50V	20A	30A	1%	1%	1%	5.1V to 5.2V
	+15V	14.0V to 16.0V	4A	8A	1%	2%	1%	15.0V to 15.1V
MAP130-4004*	-5V	Fixed	1A	1A	2%	2%	1%	-4.8V to -5.2V
	-15V	Fixed	1A	1A	2%	2%	1%	-14.7V to -15.3V
	+5V	4.75V to 5.50V	20A	30A	0.2%	1%	1%	5.15V to 5.2V
MAP130-4010	+24V	23.0V to 25.0V	3.5A	5A	0.5%	2%	1%	23.9V to 24.1V
	-15V	Fixed	1A	1A	0.5%	2%	1%	-14.5V to -15.5V
	+15V	Fixed	1A	1A	0.5%	2%	1%	14.5V to 15.5V
	+5V	4.75V to 5.50V	20A	30A	0.2%	1%	1%	5.1V to 5.25V
MAP130-4020*	+12V	11.5V to 12.8V	5A	10A	0.5%	2%	1%	11.75V to 12.0V
	-5V	Fixed	1A	1A	0.5%	2%	1%	-4.8V to -5.2V
	-12V	Fixed	3A	3A	0.5%	2%	1%	-11.6V to -12.4V
MAP130-4020*	+5V	4.75V to 5.50V	20A	30A	0.2%	1%	1%	5.1V to 5.25V
	+12V	11.5V to 12.8V	5A	10A	0.5%	2%	1%	11.75V to 12.0V
	-12V	Fixed	1A	1A	0.5%	2%	1%	-11.6V to -12.4V
MAP130-4020*	-5V	Fixed	3A	3A	0.5%	2%	1%	-4.8V to -5.2V

<sup>1</sup> Peak load for 60 seconds or less are acceptable, 10% duty cycle, maximum.

<sup>2</sup> Typical peak to peak noise expressed as a percentage of output voltage, 20MHz bandwidth.

<sup>3</sup> MAP130-1012 output currents are expressed as 12V/15V operation. MAP130-1024 output currents are expressed as 24V/28V operation.

<sup>4</sup> Peak loads up to 165 Watts, (total of all outputs), for 60 seconds or less are acceptable, (10% duty cycle max.).

<sup>5</sup> Maximum peak to peak noise expressed as a percentage of output voltage, 20MHz bandwidth.

Model numbers highlighted in yellow are not recommended for new designs.

\* Obsolete

866.513.2839

tech.support@psbel.com

belpowersolutions.com

# MAP130 Series

## Input Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS	
Input Voltage - AC	Auto-ranging	Low Range	90	115	132	VAC
		High Range	175	230	264	
Input Frequency	AC input	47		63	Hz	
Brown Out Protection	Lowest AC input voltage when regulation is maintained with full rated loads.	90			VAC	
Hold-up Time	Nominal AC input voltage (115 VAC)	130 W load:	40		mS	
Input Current	90 VAC, 130W load		3.3		A <sub>RMS</sub>	
Input Protection	Non-user serviceable internally located AC input line fuse.					
Inrush Surge Current	Internally limited by thermistor. Vin = 264 VAC (one cycle). 25° C.			38	A <sub>PK</sub>	
Operating Frequency	Switching frequency of main transformer.	Range:	16	120	kHz	

## Output Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency	Full Load @ 115 VAC (Varies with distribution of loads among outputs.)		71% typical		
Minimum Loads	MAP130-1012	1.25			Amps
	MAP130-1024	0.63			
	MAP130-1005 and all multiple output models, main channel only	3.00			
Ripple and Noise	Full Load, 20 MHz Bandwidth.		See Model Selection Chart		
Output Power	Continuous output power, all multiple output models.			130	Watts
	Peak output power (60s max., 10% duty cycle), all multiple output models.			165	
Overshoot / Undershoot	Output voltage overshoot/undershoot at turn-on / turn-off.			1	%
Regulation	Varies by output, regulation includes: line changes from 90-132 VAC or 175-264, changes in load starting at 20% load and changing to 100% load.		See Model Selection Chart		
Transient Response	Recovery time, to within 1% of initial set point due to a 50-100% load change, 4% max. deviation. (Main output only on multiple output units).			500	µS
Turn-on Delay	Time required for initial output voltage stabilization.			2	Sec
Turn-on Rise Time	Time required for output voltage to rise from 10% to 90%.			20	mS

## Interface Signals & Internal Protection

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	Provided on single output units and only the main output of multiple output units.	MAP130-1012	17.0	22.0	VDC
		MAP130-1024	32.0	37.0	
		MAP130-4004	6.2	7.4	
		All other models	5.5	6.8	
Overcurrent Protection	All models have inherent short circuit protection. Units will automatically restart at the removal of the fault.				
Remote Sense	Total voltage compensation for main output cable losses.			250	mV
Power Fail Warning <sup>6</sup>	Logic LO (denotes power fail detected).			0.7	V
	Logic HI with internal pull-up to output.		10		kΩ
	Power Fail trip point, maximum load, decreasing line.	86		94	VAC
Overtemperature Warning <sup>7</sup>	Time before regulation dropout, at full load, due to loss of input power.	5			mS
	Warning prior to system shutdown due to excessive internal temperatures. Shifts Power Fail signal to a logic LO state.	20			mS

<sup>6</sup> Power Fail not available on MAP130-1012 and MAP130-1024.

<sup>7</sup> MAP130-1012 and MAP130-1024 have overtemperature protection, but do not have the warning feature.

# MAP130 Series

## Safety, Regulatory and EMI Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	Approved to the latest edition of the following standards; UL/CSA60950-1 2nd, IEC60950-1 2nd and EN60950-1 2nd.				
Dielectric Withstand Voltage	Input to Chassis	2121			VDC
	Input to Output (tested by manufacturer only)	4242			
Electromagnetic Interference	FCC CFR title 47 Part 15 Sub-Part B - Conducted	B			Class
	EN55022 / CISPR 22 conducted	B			
	EN55022 / CISPR 22 radiated <sup>8</sup>	B			
ESD Susceptibility	Per EN61000-4-2, level 4	8			kV
Radiated Susceptibility	Per EN61000-4-3, level 3	10			V/M
EFT/Burst	Per EN61000-4-4, level 3 <sup>9</sup>	±2			kV
Input Transient Protection	EN61000-4-5 Level 3	Line to Line	1		kV
		Line to Ground	2		
Insulation Resistance	Input to output	7			MΩ
Leakage Current	Per EN60950, 264 VAC			700	μA

## Environmental Specifications

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS	
Altitude	Operating			10k	Feet	
	Non-operating			40k		
Operating Temperature <sup>10</sup>	Derate linearly above 50°C by 2.5% per °C					
		At 100% load:	0		50	°C
		At 50% load:	0		70	
Storage Temperature		-40		85	°C	
Temperature Coefficient	0°C to 70°C (after 15 minute warm-up)		±0.02	±0.05	%/°C	
Relative Humidity	Non-condensing	5		95	%RH	
Shock	Operating, peak acceleration			20	G <sub>PK</sub>	
Vibration	Random vibration, 10Hz to 2kHz, 3 axis			6	G <sub>RMS</sub>	

## Mechanical Specifications / Options

PARAMETER	CONDITIONS / DESCRIPTION
Dimensions	215.9 x 114.3 x 50.8 mm (8.5" x 4.5" x 2.00")
Weight	1.13 kg (2.5 lbs)
Cover (Option)	Add 'C' suffix to model number or order part number 412-59586-G separately. Dimensions: 8.5" x 4.5" x 2.4" (215.9 x 114.3 x 61.0 mm) For convection cooled applications with covers, derate output power as follows: Derate all multiple output models and MAP130-1005 to 120 watts. Derate MAP130-1012 and MAP130-1024 to 140 watts.

8 MAP130-1005 meets Class A, radiated.

9 MAP130-1005, MAP130-4003, and MAP130-4010, meet level 2, ±1kV.


10 External airflow of minimum 23 CFM used in ambient over 25°C.

# MAP130 Series

## Connections

CONNECTOR	CONDITIONS / DESCRIPTION
Input & Output Connections	6-32 screw wire clamps on 0.312" (7.9 mm) centers, 0.045" (1.1 mm) square pins on 0.156" (3.96 mm) centers, Mates with Molex series 2139, 6442 & 41695
Power Fail Connections	0.035" (0.89 mm) square pins on 0.100" (2.54 mm) centers; Mates with Molex series 2695 & 6471
Chassis	0.090" (2.286 mm) aluminum alloy with clear finish

Figure-1 - Mechanical Drawing

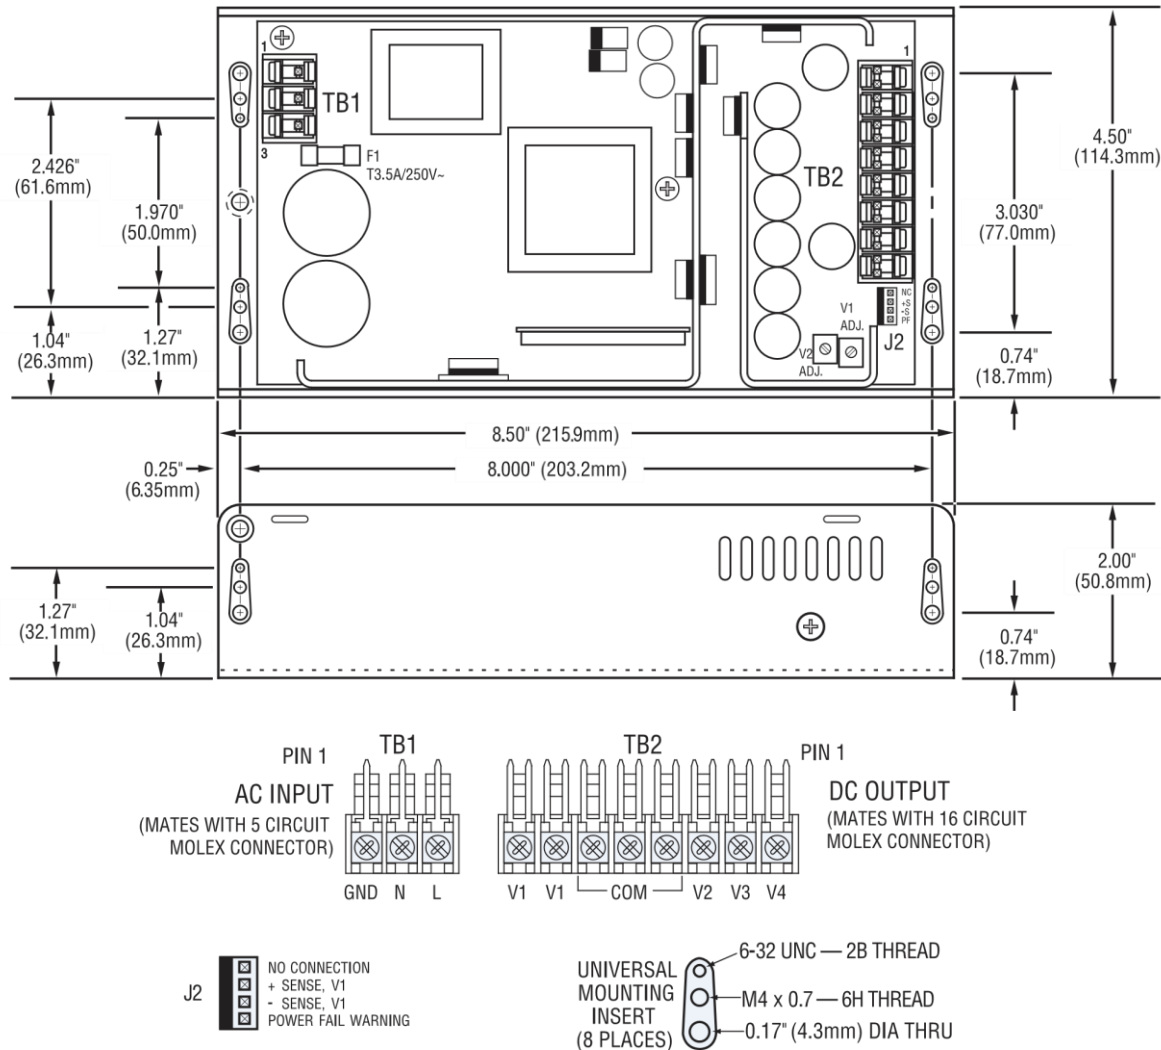

For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

866.513.2839

[tech.support@psbel.com](mailto:tech.support@psbel.com)

[belpowersolutions.com](http://belpowersolutions.com)