

2-pole solid state relays

Switches



RA2A, RK series

2-pole solid state relays

Space costs money! Reducing the size of equipment is becoming a necessity for equipment manufacturers who want to stay competitive. Carlo Gavazzi aligned its product offering accordingly and provide solutions that minimise space requirements without compromising performance.

Amongst these solutions are 2-pole solid state relays that have two outputs which can be either independently or commonly controlled, packaged in one housing providing up to 50% space savings.

The **RA2A** series covers ratings up to 40 AAC per pole and is equipped with FASTON terminations whilst the **RK** series is a more advanced version using the latest design and assembly technology covering ratings up to 75 AAC per pole and is equipped with screw terminations.

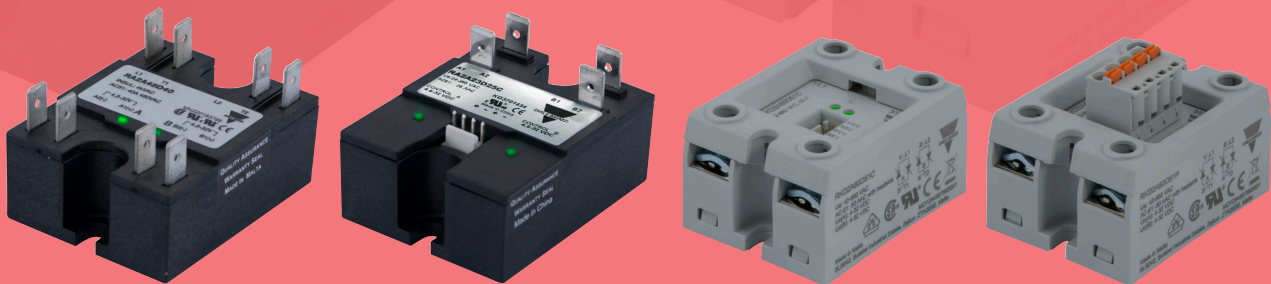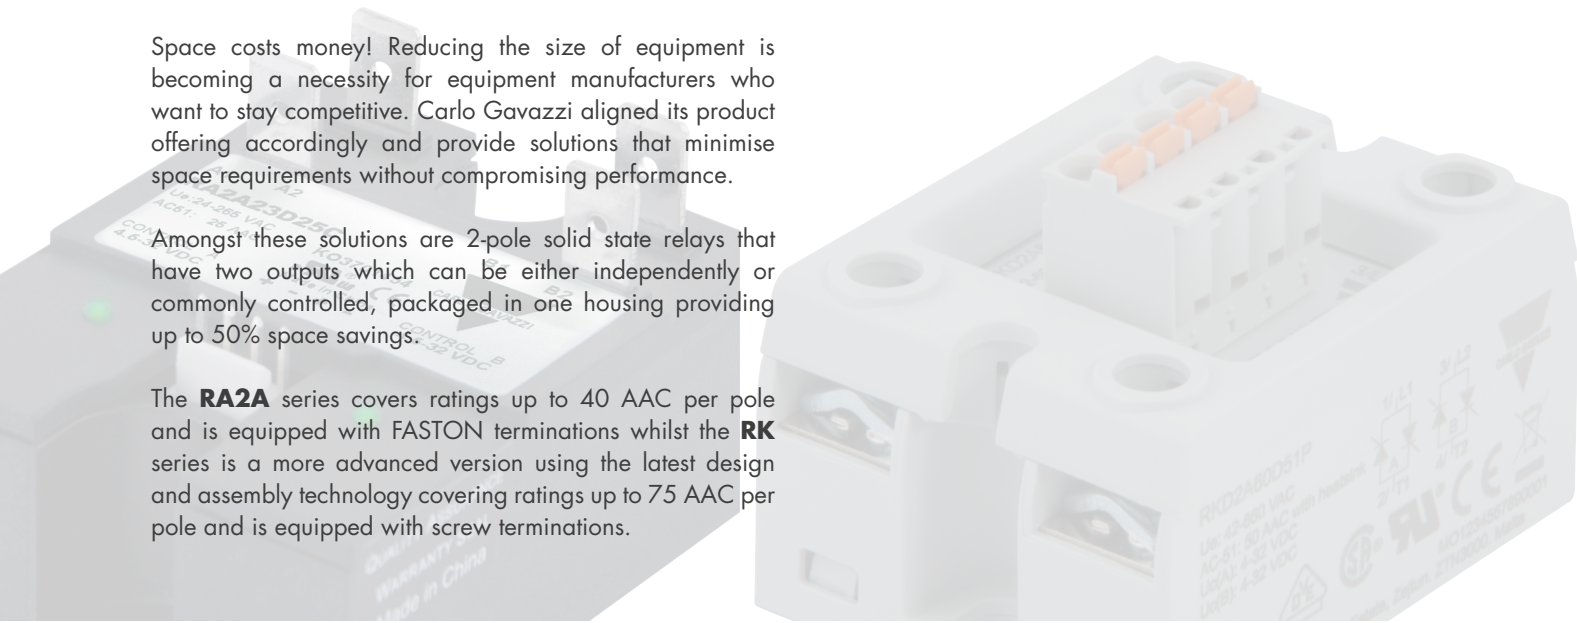

Space optimisation solutions

Space savings

- Up to 50% space savings for 2-poles
- Economy switching of 3-phase loads using 2-poles

Time savings in installation

- FASTONs for low current loads (RA2)
- Spring plug for control termination (RK..P)

Long lifetime

- Robust solution with back-to-back thyristor technology instead of triacs
- No internal moulding mass to reduce thermal stresses
- Wire bonding on power chips to reduce thermal and mechanical stresses (RK)

Efficient heat dissipation

- Optimal thermal efficiency by design - low junction temperature due to the low junction to heatsink thermal resistance (RK)

Certifications and conformance


- Certified to International standards
- 100,000 cycle test according UL requirements for Food equipment (RK)
- Conformance to glow wire requirements for Food equipment according to EN 60335 (RK)

One stop shop

- A range of Accessories including heatsinks and cables for a complete package from one supplier

Plastic & rubber

- Injection machines
- Thermoforming machines
- Temperature control units
- Dryers

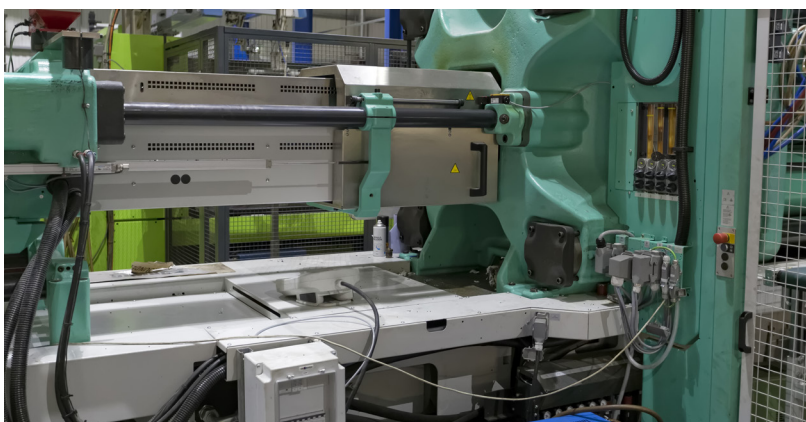

Food & beverage

- Electrical ovens
- Fryers
- Griddles
- Coffee machines



Product range overview



Series	RA2A	RA2A...C	RK...C	RK...P
Current ratings	2x 25 A, 40 A	2x 25 A, 40 A	2x 50 A, 75 A	2x 50 A, 75 A
Max. operating voltage	660 VAC	660 VAC	660 VAC	660 VAC
Power connection	FASTON 6.35mm	FASTON 6.35mm	Screw	Screw
Control connection	FASTON 6.35mm	2.54mm pitch header	2.54mm pitch header	spring plug (provided)
Variants	Dual output with independent control		Dual output with independent or common control	
Switching mode	Zero cross	Zero cross	Zero cross or Instant on	
Control ON LED indication (x2)	■	■	■	■
DC control voltage	■	■	■	■
Integrated overvoltage protection	-	Varistor	Transil	Transil
Dimensions W x H x D mm	45 x 58 x 32	45 x 58 x 35	45 x 58 x 33	45 x 58 x 44
Approvals	CE C RU US SP	CE C RU US	CE C RU US	SP DVE


RA2A series

2-pole solid state relays

The **RA2A** series consists of solid state relays having 2 outputs independently controlled packaged in a housing having a maximum width of 45mm. This gives a maximum 50% space saving in control panels when compared to 2x standard 1-pole solid state relays.

The **RA2A** is equipped with FASTON terminals on both input and output for time savings in installations. The **RA2A..C** variants are also equipped with FASTONs on the output but the control termination consists of a 2.54mm pitch header.

Ratings go up to 660 VAC, 40 A. The **RA2A** is ideally suited for resistive loads, and the **RA2A..M** is specifically designed for inductive loads.

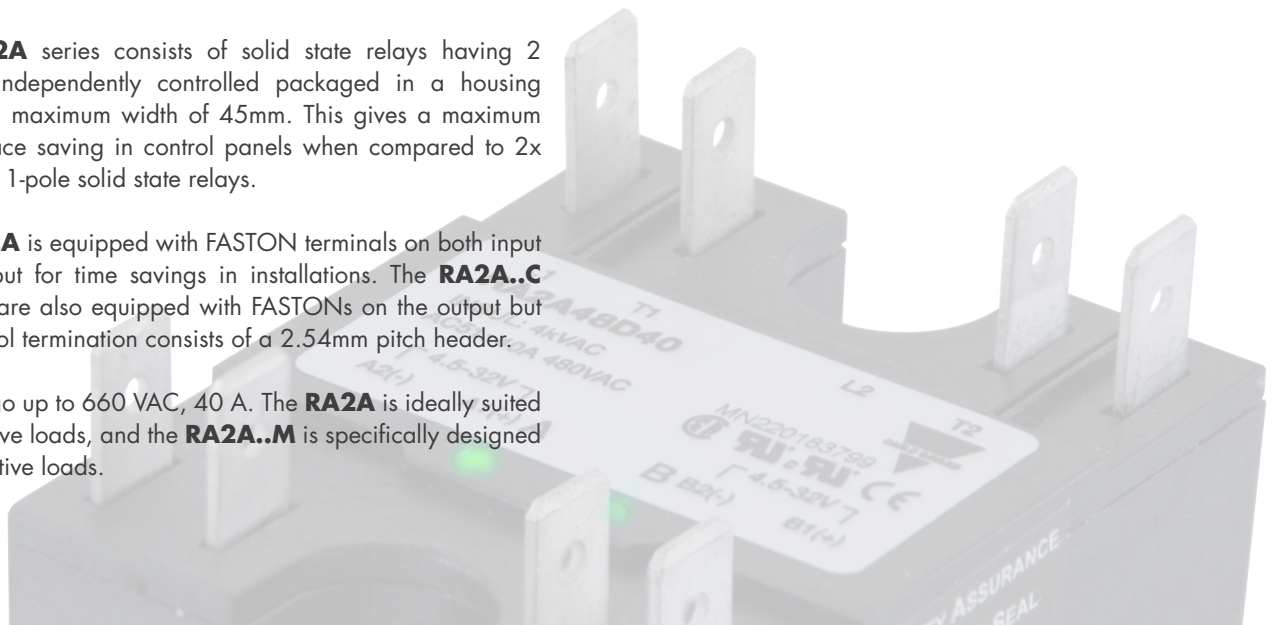

Fast installation with quick connect terminals


Applications

In some cases, the application conditions will necessitate that the solid state relay is mounted on a heatsink in order to keep the junction temperature of the solid state relay from exceeding its maximum rating.

The size of heatsink required can be determined either from the product datasheets or by making use of the online Heatsink Selector Tool available at:

<http://www.productselection.net/heatsink/heatsinkSelector.php>

Carlo Gavazzi offers a range of heatsinks that can be provided with a pre-mounted solid state relay. Consult a Carlo Gavazzi representative for further details regarding these assemblies.

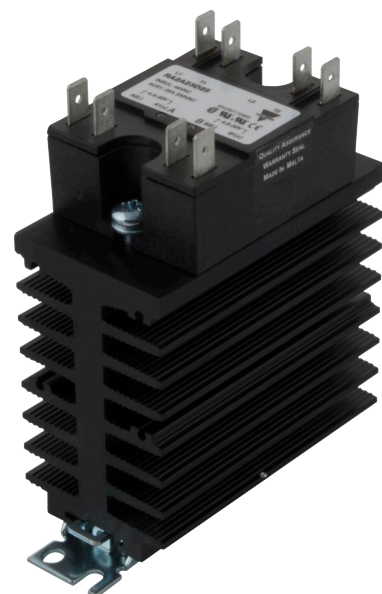

Main features

Long lifetime
Free of moulding mass to ensure components are not subject to thermal and mechanical stresses

Fast installation
Quick connect terminals (FASTONS)

User friendly
2x green LEDs for control ON indication

Versatile
RA2A for resistive loads
RA2A..M for inductive loads

Compact
2 independently controlled poles in 1 housing

Approvals



Approvals



Reliable
Integrated overvoltage protection for RA2A..C

Control termination
6.35mm FASTONS for RA2A

Control termination
2.54mm pitch header for RA2A..C

Selection guide

RA2A series - 2 independently controlled poles for resistive loads

Control termination	Max. current	Control voltage	Operational voltage			
			24-265 VAC	42-440 VAC	42-530 VAC	42-660 VAC
Fastons	2 x 25 AAC	4.5 - 32 VDC	RA2A23D25	RA2A40D25	RA2A48D25	RA2A60D25
	2 x 40 AAC	4.5 - 32 VDC	RA2A23D40	RA2A40D40	RA2A48D40	RA2A60D40
Pins	2 x 25 AAC	4.5 - 32 VDC	RA2A23D25C	-	-	RA2A60D25C
	2 x 40 AAC	4.5 - 32 VDC	RA2A23D40C	-	-	RA2A60D40C

RA2A..M series - 2 independently controlled poles for inductive loads

Control termination	Max. current	Control voltage	Operational voltage			
			24-265 VAC	42-440 VAC	42-530 VAC	42-660 VAC
Fastons	2 x 25 AAC	4.5 - 32 VDC	RA2A23D25M	RA2A40D25M	RA2A48D25M	RA2A60D25M
	2 x 40 AAC	4.5 - 32 VDC	RA2A23D40M	RA2A40D40M	RA2A48D40M	RA2A60D40M

Further details are available on online datasheets at www.gavazziautomation.com


RK series

2-pole solid state relays

The **RK** series also consists of solid state relays with 2 outputs packaged in a platform having a maximum product width of 45mm. However, the **RK** series is dedicated for high rated loads up to 660 VAC, 75 A and hence termination for power connection consists of screw terminals.



The **RK..P** is equipped with a spring plug for control connection that is provided with the solid state relay whilst the **RK..C** is equipped with a 2.54mm pitch header.

The **RK** series consists of 2 variants: the **RKD2** series has an independent control for each of the poles, the **RK2** series has common control for the 2 poles making it ideal for economy switching of 3-phase loads.

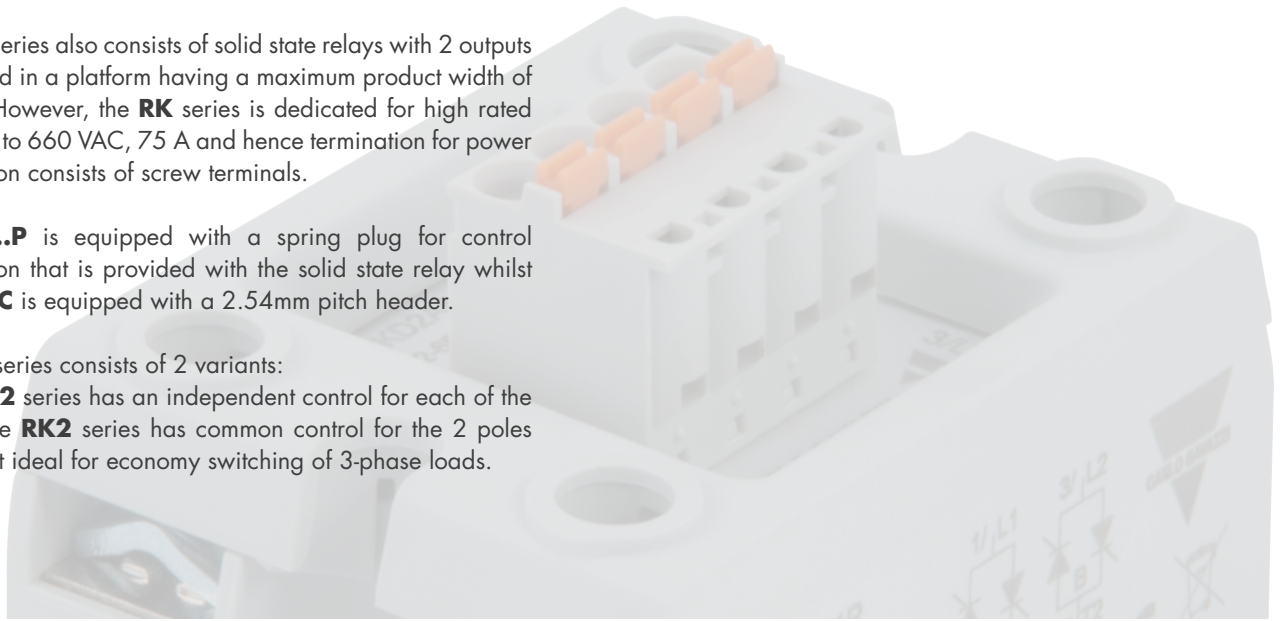

Screw output termination for high power

Applications

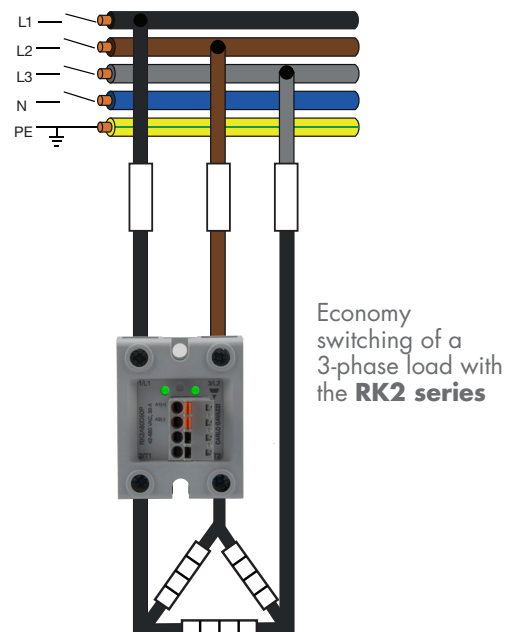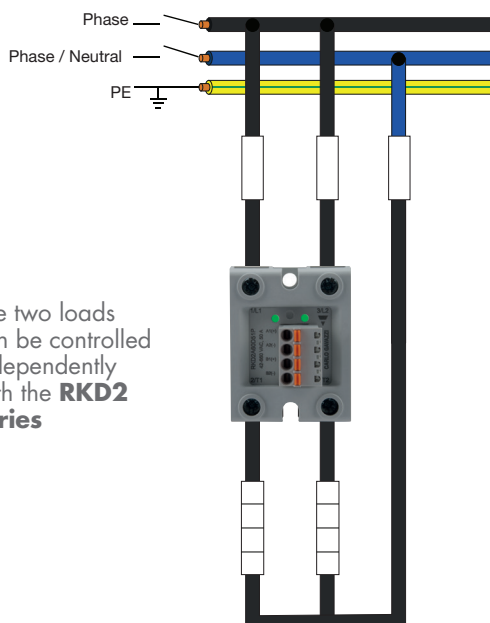

Main features

Easy replacement
Pluggable control termination

Flexible connections
Removable touch protection cover for connection of ring lugs

Long lifetime
Wire bonding technology for lower thermal and mechanical stresses on power chips

Time saving
Pre-attached thermal interface to backplate

User friendly 2x green LEDs for control ON indication

Low downtime
Integrated overvoltage protection

Space savings
2 poles in a 45mm wide housing **RKD2** for independent control **RK2** for common control

Conformance to Food Industry
UL certified for 100,000 cycle test, Conforms to glow wire requirements of EN 60335

Selection guide

RKD2 series - 2 independently controlled poles

Control termination	Max. current	I ² t	Control voltage	Operational voltage	
				24 - 265 VAC	42 - 660 VAC
Pins	2x 50 AAC	1500 A ² s	4 - 32 VDC	RKD2A23D50C	RKD2A60D50C
	2x 50 AAC	3000 A ² s	4 - 32 VDC	RKD2A23D51C	RKD2A60D51C
	2x 75 AAC	9800 A ² s	4 - 32 VDC	-	RKD2A60D75C
Spring plug	2x 50 AAC	1500 A ² s	4 - 32 VDC	RKD2A23D50P	RKD2A60D50P
	2x 50 AAC	3000 A ² s	4 - 32 VDC	RKD2A23D51P	RKD2A60D51P
	2x 75 AAC	9800 A ² s	4 - 32 VDC	-	RKD2A60D75P

RK2 series - common control for the 2 poles

Control termination	Max. current	I ² t	Control voltage	Operational voltage	
				24 - 265 VAC	42 - 660 VAC
Pins	2x 50 AAC	1500 A ² s	4 - 32 VDC	-	RK2A60D50C
	2x 50 AAC	3000 A ² s	4 - 32 VDC	-	RK2A60D51C
	2x 75 AAC	9800 A ² s	4 - 32 VDC	-	RK2A60D75C
Spring plug	2x 50 AAC	1500 A ² s	4 - 32 VDC	-	RK2A60D50P
	2x 50 AAC	3000 A ² s	4 - 32 VDC	-	RK2A60D51P
	2x 75 AAC	9800 A ² s	4 - 32 VDC	-	RK2A60D75P

Instant on versions are also available: RKD2B., RK2B..
Further details are available on online datasheets at www.gavazziautomation.com

OUR SALES NETWORK IN EUROPE

AUSTRIA

Carlo Gavazzi GmbH
Ketzergrasse 374,
A-1230 Wien
Tel: +43 1 888 4112
Fax: +43 1 889 10 53
office@carlo gavazzi.at

FRANCE

Carlo Gavazzi Sarl
Zac de Paris Nord II, 69, rue de la Belle Etoile,
F-95956 Roissy CDG Cedex
Tel: +33 1 49 38 98 60
Fax: +33 1 48 63 27 43
french.team@carlo gavazzi.fr

ITALY

Carlo Gavazzi SpA
Via Milano 13,
I-20020 Lainate
Tel: +39 02 931 761
Fax: +39 02 931 763 01
info@gavazziacbu.it

SPAIN

Carlo Gavazzi SA
Avda. Iparraguirre, 80-82,
E-48940 Leioa (Bizkaia)
Tel: +34 94 480 4037
Fax: +34 94 431 6081
gavazzi@gavazzi.es

BELGIUM

Carlo Gavazzi NV/SA
Mechelsesteenweg 311,
B-1800 Vilvoorde
Tel: +32 2 257 4120
Fax: +32 2 257 41 25
sales@carlo gavazzi.be

GERMANY

Carlo Gavazzi GmbH
Pfnorstr. 10-14
D-64293 Darmstadt
Tel: +49 6151 81000
Fax: +49 6151 81 00 40
info@gavazzi.de

NETHERLANDS

Carlo Gavazzi BV
Wijkermeerweg 23,
NL-1948 NT Beverwijk
Tel: +31 251 22 9345
Fax: +31 251 22 60 55
info@carlo gavazzi.nl

SWEDEN

Carlo Gavazzi AB
V:a Kyrkogatan 1,
S-652 24 Karlstad
Tel: +46 54 85 1125
Fax: +46 54 85 11 77
info@carlo gavazzi.se

DENMARK

Carlo Gavazzi Handel A/S
Over Hadstenevej 40,
DK-8370 Hadsten
Tel: +45 89 60 6100
Fax: +45 86 98 15 30
handel@gavazzi.dk

GREAT BRITAIN

Carlo Gavazzi UK Ltd
4.4 Frimley Business Park,
Frimley, Camberley, Surrey GU16 7SG
Tel: +44 1 276 854 110
Fax: +44 1 276 682 140
sales@carlo gavazzi.co.uk

NORWAY

Carlo Gavazzi AS
Melkeveien 13,
N-3919 Porsgrunn
Tel: +47 35 93 0800
Fax: +47 35 93 08 01
post@gavazzi.no

SWITZERLAND

Carlo Gavazzi AG
Verkauf Schweiz/Vente Suisse
Sumpfstrasse 3,
CH-6312 Steinhausen
Tel: +41 41 747 4535
Fax: +41 41 740 45 40
info@carlo gavazzi.ch

FINLAND

Carlo Gavazzi OY AB
Petaksentie 2-4,
FI-00630 Helsinki
Tel: +358 9 756 2000
Fax: +358 9 756 20010
myynti@gavazzi.fi

PORTUGAL

Carlo Gavazzi Lda
Rua dos Jerónimos 38-B,
P-1400-212 Lisboa
Tel: +351 21 361 7060
Fax: +351 21 362 13 73
carlo gavazzi@carlo gavazzi.pt

OUR SALES NETWORK IN THE AMERICAS

USA

Carlo Gavazzi Inc.
750 Hastings Lane,
Buffalo Grove, IL 60089, USA
Tel: +1 847 465 6100
Fax: +1 847 465 7373
sales@carlo gavazzi.com

CANADA

Carlo Gavazzi Inc.
2660 Meadowvale Boulevard,
Mississauga, ON L5N 6M6, Canada
Tel: +1 905 542 0979
Fax: +1 905 542 22 48
gavazzi@carlo gavazzi.com

MEXICO

Carlo Gavazzi Mexico S.A. de C.V.
Calle La Montaña no. 28, Fracc. Los Pastores
Naucalpan de Juárez, EDOMEX CP 53340
Tel & Fax: +52.55.5373.7042
mexicosales@carlo gavazzi.com

BRAZIL

Carlo Gavazzi Automação Ltda.
Av. Francisco Matarazzo, 1752
Conj 2108 - Barra Funda - São Paulo/SP
Tel: +55 11 3052 0832
Fax: +55 11 3057 1753
info@carlo gavazzi.com.br

OUR SALES NETWORK IN ASIA AND PACIFIC

SINGAPORE

Carlo Gavazzi Automation Singapore
Pte Ltd 61 Tai Seng Avenue #05-06
Print Media Hub @ Paya Lebar iPark
Singapore 534167
Tel: +65 67 466 990
Fax: +65 67 461 980
info@carlo gavazzi.com.sg

MALAYSIA

Carlo Gavazzi Automation
(M) SDN. BHD.
D12-06-G, Block D12,
Pusat Perdagangan Dana 1,
Jalan PJU 1A/46, 47301 Petaling Jaya,
Selangor, Malaysia.
Tel: +60 3 7842 7299
Fax: +60 3 7842 7399
sales@gavazzi-asia.com

CHINA

Carlo Gavazzi Automation
(China) Co. Ltd.
Unit 2308, 23/F.,
News Building, Block 1, 1002
Middle Shennan Zhong Road,
Shenzhen, China
Tel: +86 755 83699500
Fax: +86 755 83699300
sales@carlo gavazzi.cn

HONG KONG

Carlo Gavazzi Automation
Hong Kong Ltd.
Unit 3 12/F Crown Industrial Bldg.,
106 How Ming St., Kwun Tong,
Kowloon, Hong Kong
Tel: +852 23041228
Fax: +852 23443689

OUR COMPETENCE CENTRES AND PRODUCTION SITES

DENMARK

Carlo Gavazzi Industri A/S
Hadsten

MALTA

Carlo Gavazzi Ltd
Zejtun

ITALY

Carlo Gavazzi Controls SpA
Belluno

LITHUANIA

Uab Carlo Gavazzi Industri Kaunas
Kaunas

CHINA

Carlo Gavazzi Automation (Kunshan) Co., Ltd.
Kunshan

HEADQUARTERS

Carlo Gavazzi Automation SpA
Via Milano, 13
I-20020 - Lainate (MI) - ITALY
Tel: +39 02 931 761
info@gavazziautomation.com



CARLO GAVAZZI
Automation Components

Energy to Components!

www.gavazziautomation.com

