multimec® 3A + 1B/1C + 2A/2B

Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  low temp: -40/+115°C
  high temp: -40/+160°C

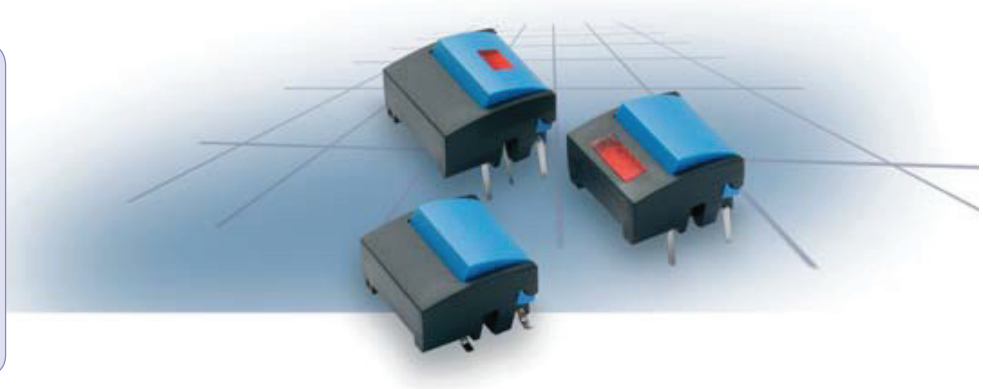

Dimensions (through-hole)



Dimensions w/LED in switch (1C/1H)



Dimensions w/LED PCB mounted (2B)



Dimensions (SMD)



How to order

3A Switch

Mounting
T through-hole
S surface mount

L 6 low temp.
H 9 high temp.

+

1B Cap

00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

+

2A Bezel

00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

For 1B and 2A only:

30 ultra blue
40 dusty blue
42 aqua blue
32 mint green
33 tele grey
34 melon
38 noble red
50 metal dark blue
53 metal light grey
57 metal dark grey
58 metal bordeaux

3A Switch

Mounting
T through-hole

L 6 low temp.
H 9 high temp.

LED
00 blue
20 green
40 yellow
80 red

+

1C Cap

00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

+

Lens
1 transparent
2 green
4 yellow
8 red

2A Bezel

00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

3A Switch

Mounting
T through-hole
S surface mount

L 6 low temp.
H 9 high temp.

+

1B Cap

00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

+

2B Bezel

00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

Lens
1 transparent
2 green
4 yellow
6 frosted white
8 red

+

2BXXX LED for 2B bezel

20 green
40 yellow
80 red

Keycaps and bezels shown on this page can also be used on **illumec™ switch 4A - see page 9. Part nos. for bezels for 4A are 2C and 2D.**

Ordering example: 3ATL640 + 1C094 + 2A04

For updates of products and/or changes of specifications please see **www.mec.dk**