

NA1394-6-W-B

Firewire 6 with IEEE 1394 6 pole receptacles on both ends, black D-housing

Due to the rising digitisation the interface problems between audio/video networks, IT equipment (e.g. Mac) and mLAN connections increase.


Neutrik's Firewire feedthrough type 1394a, mounted in the standardized D-shape housing, solves this problem.



Downloads

Features & Benefits

- Ideal for audio networking and integration of digital equipment into audio systems
- Firewire feedthrough with 6 pole IEEE 1394 receptacle at both ends
- Universally accepted standard D-shape housing
- Removable screen to chassis grounding:

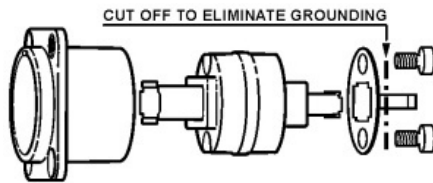

Technical Information [▼ hide](#)

Product	
Title	NA1394-6-W-B
Connection Type	Firewire
Gender	female
Mechanical	
Mounting direction	Front mounting
Chassis shape	D
Material	
Contact plating	Au
Contacts	Brass (CuZn39Pb3)
Insert	PBTP 15 % GR
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Black chromium
Environmental	
Flammability	UL 94 V-0
Standard compliance	IEEE 1394
Temperature range	-25 °C to +85 °C

Accessories

DSS-*

MFD

SCDP-*

SCDX



SCCD-W



SCD-W

