1.69.508.840/1503



Signal lamp with integrated LED, 5 mm, protruding round bezel, 28 Volt, bezel green, Solder terminal



fields of application

- > Measurement-control-regulation
- > Electrical engineering
- > Mechanical and system engineering
- > Signalling systems
- > Model construction

CE

description

Signal lamps with integrated LED, mounting hole diameter 5 mm

technical data

>	genera
---	--------

Bezel color green

Property of bezel / mushroom transparent

Bezel shape round illuminated Yes
Packaging unit 10 pcs.
Degree of protection, front side, IP40

according to DIN EN 60529

MOQ order 10 pcs.

RoHS compliant Yes

REACH compliant Yes

> mounting diameters

Mounting hole 5 mm

Mounting depth 18 mm

Installation height 3.5 mm

Collar dimension 5.8 mm

> mechanical data

Fixing Pushing into mounting hole

Terminal on the rear Solder terminal

Solderability Yes

direct links

> RAFI eCatalog

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which my change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

date: Sep 25, 2021 page: 1/3

RAFI GmbH & Co. KG

Ravensburger Str. 128-134 88276 Berg / Ravensburg Germany www.rafi-group.com, info.headquarters@rafi-group.com

1.69.508.840/1503



> electrical data

Operating voltage of the luminous 24 V

element, min.

Operating voltage of the luminous 28 V


element, max.

1.69.508.840/1503




drawings

Dimensioned drawing

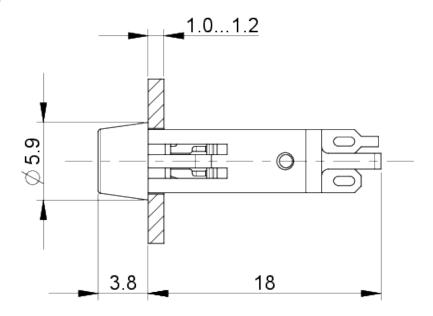

Mounting hole drawing



RAFI GmbH & Co. KG