


60 Amp

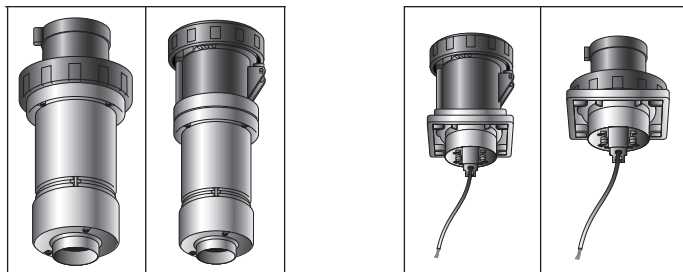

	Poles & Wires	Configuration			Voltage/ Color Coding	Plug	Connector	Cable O.D. Range Inches	Receptacle*	Inlet*
		Receptacle/ Connector	Plug/ Inlet	Clock Hour						
WATERTIGHT IP67	2P3W			4h	125	RS360P4W	RS360C4W	.937-1.375	RS360R4W	RS360B4W
	2P3W			6h	250	RS360P6W	RS360C6W	.937-1.375	RS360R6W	RS360B6W
	2P3W			5h	277	RS360P5W	RS360C5W	.937-1.375	RS360R5W	RS360B5W
	2P3W			7h	480	RS360P7W	RS360C7W	.937-1.375	RS360R7W	RS360B7W
	2P3W			3h	250DC	RS360P3W	RS360C3W	.937-1.375	RS360R3W	RS360B3W
	3P4W			12h	125/250	RS460P12W	RS460C12W	.937-1.375	RS460R12W	RS460B12W
	3P4W			9h	3Ø250	RS460P9W	RS460C9W	.937-1.375	RS460R9W	RS460B9W
	3P4W			7h	3Ø480	RS460P7W	RS460C7W	.937-1.375	RS460R7W	RS460B7W
	3P4W			5h	3Ø600	RS460P5W	RS460C5W	.937-1.375	RS460R5W	RS460B5W
	4P5W			9h	3ØY120/208	RS560P9W	RS560C9W	.937-1.375	RS560R9W	RS560B9W
	4P5W			7h	3ØY277/480	RS560P7W	RS560C7W	.937-1.375	RS560R7W	RS560B7W
	4P5W			5h	3ØY347/600	RS560P5W	RS560C5W	.937-1.375	RS560R5W	RS560B5W

*See Page 81 for back box/mounting options.

UL Listing E2630, E47956
UL Classification E205590

Liquidtight Conduit Adapter Kit*

6LTK5C10 60A 5W 1" NPT

*Additional sizes available on request.

Note: All UniGard 60 & 100 Amp devices ship standard with IEC 309-1 configuration center "pilot" pin/sleeves used for auxillary contact service.

Special construction without these pilots is available.