


KEMET Part Number: PEH200MJ5220MB2
(A451MK223M063A)

Aluminum Electrolytic, 85C, KEMET, PEH200, 0.022 F, 20%, 63 V, -40/+85C

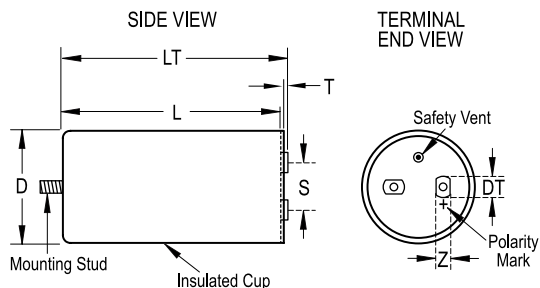

General Information

Dielectric:	Aluminum Electrolytic
Supplier:	KEMET
Series:	PEH200
Description:	Screw Terminal, Aluminum Electrolytic
RoHS:	Yes
Notes:	Dimensions D And L Include Slewing. MS = M12x16

Dimensions

D	51.6mm +/-1mm
L	95.5mm +/-1mm
T	4.9mm NOM
S	22mm
DT	15mm NOM
LT	103.4mm +/-1mm
Z	13mm NOM

Packaging Specifications

Weight:	240 g
Slewing:	Yes
Packaging:	Bulk
Packaging Quantity:	20

Specifications

Capacitance:	0.022 F
Capacitance Tolerance:	20%
Voltage DC:	63 VDC
Temperature Range:	-40/+85C
Rated Temperature:	85C
Life:	12000 Hrs (Rated Voltage And Ripple Current At 85C)
Resistance:	10 mOhms (100Hz 20C), 8 mOhms (100kHz 20C)
Current:	19 Amps (100Hz 85C), 42 Amps (10kHz 50C), 30.9 Amps (10kHz 40C)
Leakage:	8158 uAmps (5min 20C)
Inductance:	16 nH (ESL)